

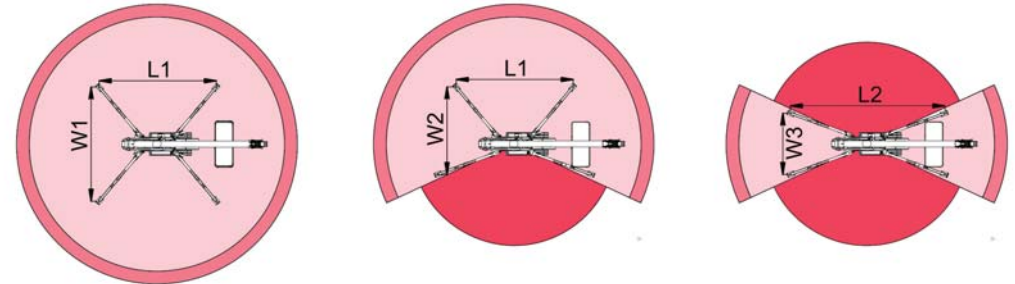


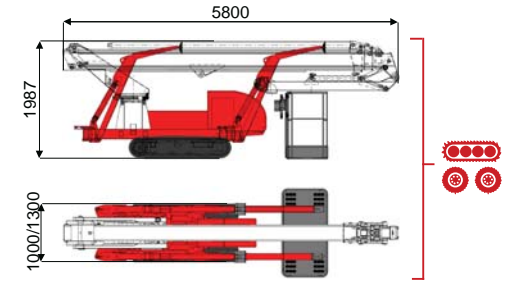

22,3 m ↑
10,3 m →
250 Kg

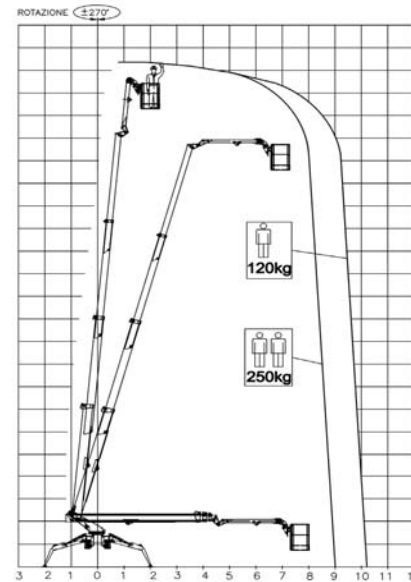

9000 mm	10300 mm	5500 mm	L1	L2	W1	W2	W3
250 kg	120 kg	120/250 kg	4900 mm	6250 mm	4350 mm	3350 mm	2750 mm

BI-ENERGY
Diesel+AC



TSJ 23.1/C-R 22.3 m 10,3 m 250 kg 175° 540° 150x70 cm 90°+80° 2,75-4,35 m 36% 25% 2,25 km/h 3100 kg 19 kN 1,56 kN/m² 3,26 kN/m² 1000/1300 mm 5817 mm 1970 mm



Battery type



Battery charge



Add. Weight



Autonomy



Charging time

Electropump

ECO	DC+AC		48V 320 A/h 5h	230V-48V 45A	450 kg	6-7 h endless	7h	48V 12 kW
ECO	DC+AC		48V 270 A/h 5h	230V-48V 45A	400 kg	6-7 h endless	7h	48V 9 kW
HYBRID	Diesel+DC		24V 240 A/h 5h	230V-24V 35A	200 kg	2-3 h endless	7h	24VD 3 kW

