

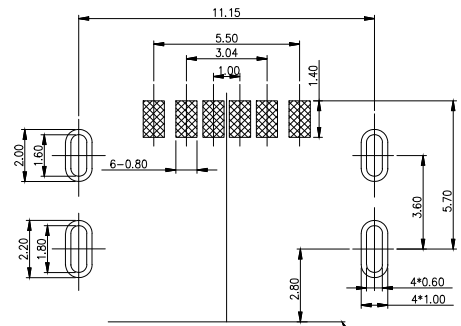

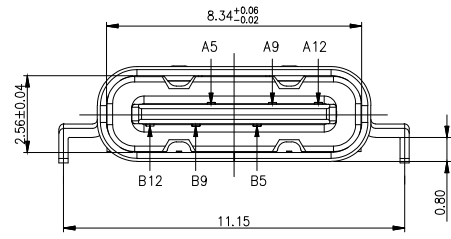
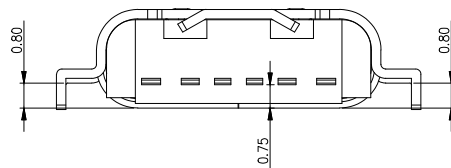



REV	MODIFICATION	DRAW	DATE
A.00	新版发行		20201125

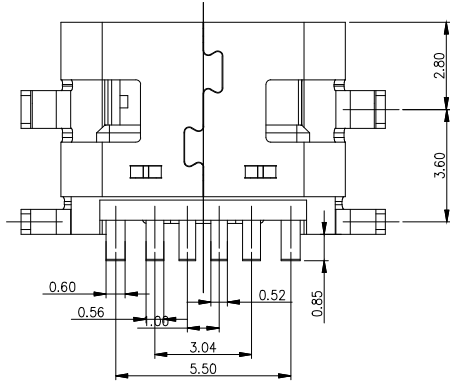

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

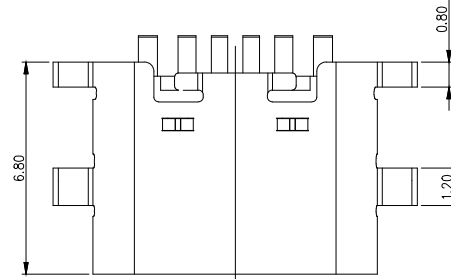

- NOTES:
- HOUSING: LCP, UL 94V-0, COLOR- BLUE (PANTONE 300C) OR BLACK
 - BOTTOM COVER: LCP, UL 94V-0, COLOR- BLUE (PANTONE 300C) OR BLACK
 - CONTACT: USB3 C2680-H T=0.25mm ; USB2 C5191-H T=0.25mm
30μ" MIN. GOLDPLATED ON CONTACT AREA, 120μ" MIN. MATTE TIN PLATED ON SOLDERING TAIL, 80μ" MIN. NICKEL UNDER-PLATED OVERALL
 - FRONT SHELL: SUS304-1/2H, T=0.25mm, 30μ" MIN. NICKEL PLATED OVER ALL, 100μ" MIN. MATTE TIN PLATED ON SOLDERING TAIL,
 - MIDDLE SHELL: SUS304-1/2H, T=0.25mm,
 - REAR SHELL: SUS304-1/2H, T=0.20mm,
 - THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2011/65/EU FOR RoHS COMPLIANT. OR PER IEC 61249-2-21 FOR HALOGEN-FREE COMPLIANT.

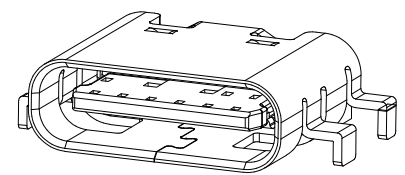

PEUE ®		LINEAR ANGLE .X 0.25 .X 5° .XX 0.25 .X 2° .XXX 0.25 .XX 5°		广东省振端实业有限公司 GuangDong Zhenduan Industrial Co.,Ltd			
产品名称: (PARTNAME)			规格型号: (SPEC) TYPE-C 6Pin沉板0.8 L=6.8				
校 对: APPRO.BY		厂内料号: (PARTNO)		客户料号: (PARTNO)		数量: (CNUM)	
设 计: DESIGN.BY						1	
绘 图: DOWG.BY		单 位: UNIT:	mm	比 例: SCALE:	N/A	张 数: PAPERS: 1/1	
					版 本: RVE:	A.00	

PIN ASSIGNMENTS			
PIN	SIGNAL NAME	PIN	SIGNAL NAME
A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2